


FRP Kemlite Fiberglass Cooling Tower Panels

Profile: **7.2 Box Rib Non-Fire-Rated**
 Weight: 8oz/ft², 12oz/ft², 16 oz/ft²
 Color: 675 Light Gray
 Product Code: 455CT

Technical Data 6538
 Rev. 2
 2/07

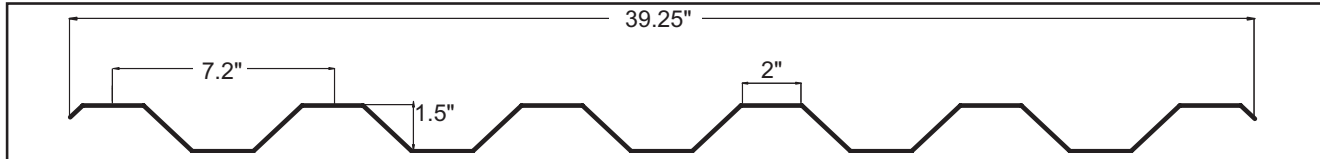

PROPERTIES	7.2 BOX RIB NON-FIRE-RATED	ASTM METHOD
Nominal Panel Weight	8oz/ft ²	—
Tensile Strength	8,000 psi	ASTM D638
Tensile Modulus	1,100,000 psi	ASTM D638
Flexural Strength	20,000 psi	ASTM D790
Flexural Modulus	600,000 psi	ASTM D790
Barcol Hardness	45	ASTM D2583
Light Transmission	< 5%	ASTM D1494
Flame Spread	N/A	ASTM E84
Burning Rate	<2.5 in/min	ASTM D635
Burn Length	N/A	ASTM D635
U.B.C. Class	CC2	—

TOLERANCES (ALL PANELS)	
Panel Weight	±10%
Rib Height	±1/8"
Width	±1/8"
Length (<i>panels up to 30' in length</i>)	±1/4"
Length (<i>panels > 30' in length</i>)	±3/8"

FLAME SPREAD AND SMOKE DEVELOPMENT RATINGS
 The numerical flame spread and smoke development ratings are not intended to reflect hazards presented by Crane Composites' products or any other fire conditions. These ratings are determined by small-scale tests conducted by Underwriters Laboratories and other independent testing facilities using the American Society for Testing and Materials E-84 test standard (commonly referred to as the "Tunnel Test"). CRANE COMPOSITES PROVIDES THESE RATINGS FOR MATERIAL COMPARISON PURPOSES ONLY. Like other organic building materials (e.g. wood), panels made of fiberglass reinforced plastic resins will burn. When ignited, frp may produce dense smoke very rapidly. All smoke is toxic. Fire safety requires proper design of facilities and fire suppression systems, as well as precautions during construction occupancy. Local codes, insurance requirements and any special needs of the product user will determine the correct fire-rated products and fire suppression system necessary for a specific installation.

CODES & APPROVALS

- ♦ASTM D-3841 - "Specification for Glass Fiber-Reinforced Polyester Plastic Panels".
- ♦CTI Code for Standard Specification, Bulletin STD-131- "Fiberglass Reinforced Plastic Panels for Application on Industrial Water Cooling Towers".

We believe all information given is accurate. It is offered in good faith, but without guarantee. Since conditions of use are beyond our control, all risks are assumed by the user. Nothing herein shall be construed as a recommendation for uses which infringe on valid patents or as extending a license under valid patents.



www.kemlitect.com
 1-800-435-0080
 1-815-467-8600
 1-815-467-8666 fax

Corporate Sales Office
 23525 W. Eames St.
 Channahon, IL 60410

CRANE Composites
A Crane Co. Company
 Form 6538 Rev. 02 (3/19)